

NOTES:

- 1. SUBSTRATE: FUSED SILICA (CORNING 7980)
- 2. COATING (APPLY ACROSS CLEAR APERTURE) \$1 & \$2: R(ABS) ≤1.0% FROM 350 - 450nm R(AVG) ≤1.5% FROM 250 - 700nm
- 3. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 WITHIN <10 ARCSEC

4. FINE GRIND SURFACE

5. ROHS COMPLIANT

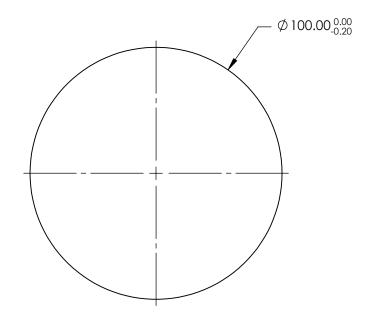

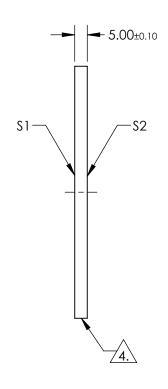

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2
SHAPE	PLANO	PLANO
SURFACE QUALITY	40-20	40-20
CLEAR APERTURE	Ø 90.00	Ø 90.00
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

			Edmund Option		S®
	THIRD ANGLE PROJECTION	$\phi \Leftrightarrow$	TITLE	100mm Dia., 5mm Thick, UV-VIS Coated λ/10 Fused Silica Window	
,	ALL DIMS IN	mm	DWG NO	22064	SHEET 1 OF 1