


UV-VIS Coating Curve

Coating Specification: $R_{\text{avg}} \leq 1.25\%$ @ 250 - 532nm, $R_{\text{abs}} \leq 1.0\%$ @ 350 - 450nm,
 $R_{\text{avg}} \leq 1.5\%$ @ 250 - 700nm

Damage Threshold, Reference: 3 J/cm² @ 355nm, 10ns; 3 J/cm² @ 532nm, 10ns

Theoretical Reflection Curve

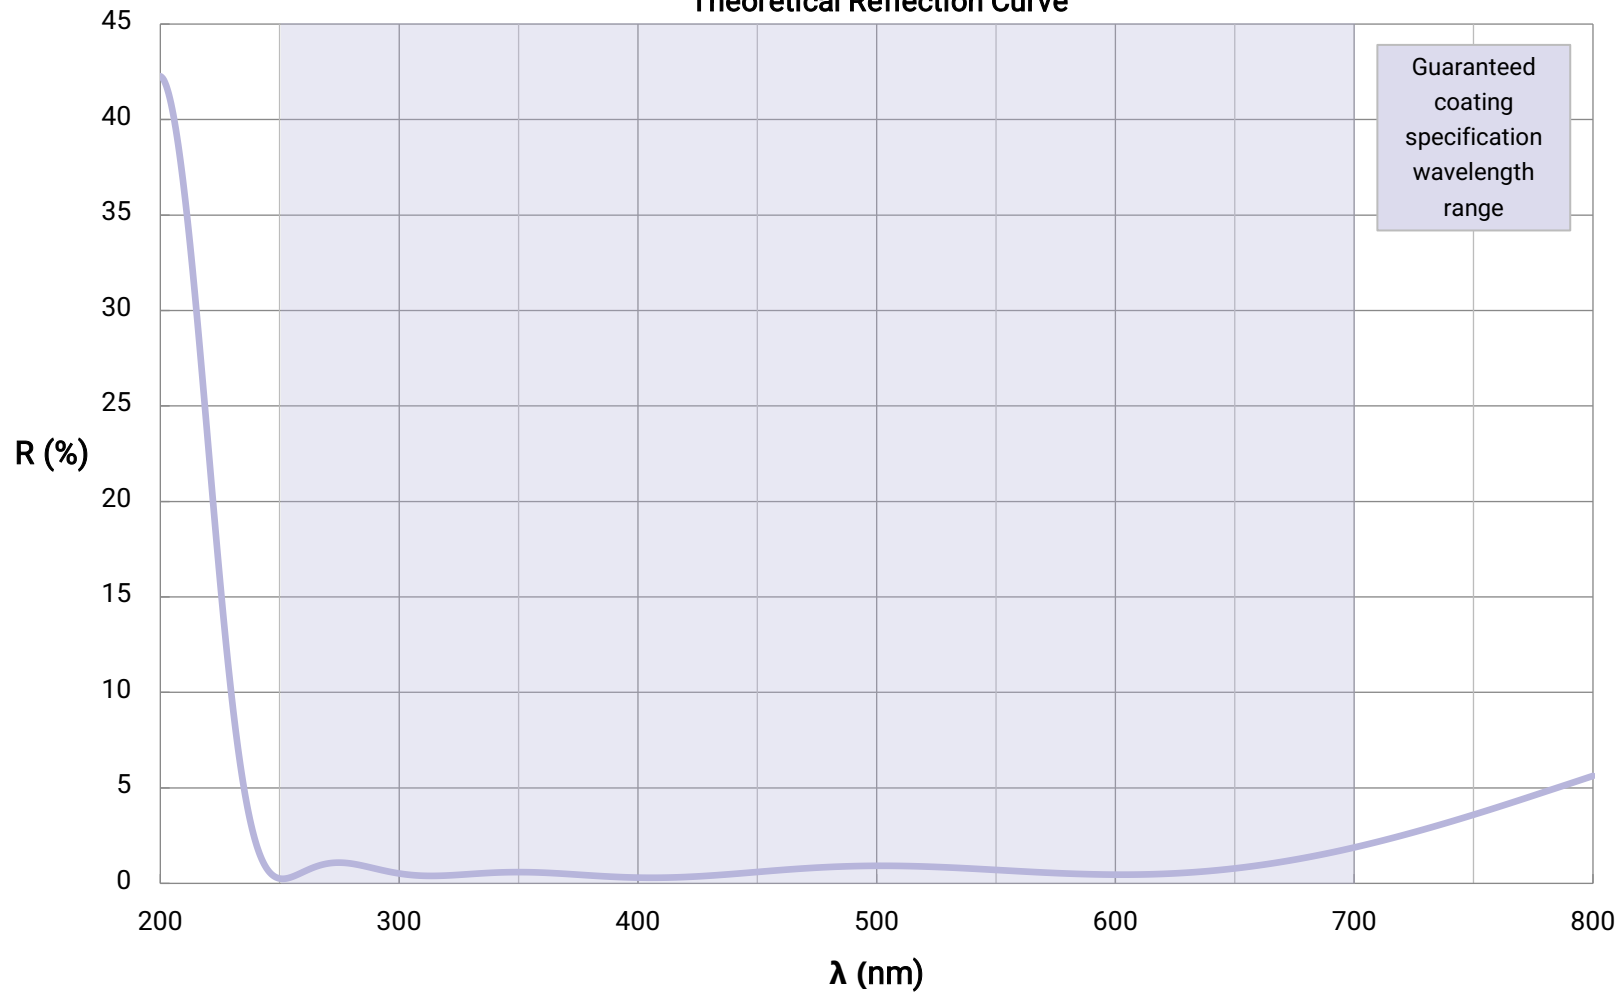

© COPYRIGHT 2020 EDMUND OPTICS, INC. ALL RIGHTS RESERVED