NOTES:

SHAPE

BEVEL

SURFACE QUALITY

CLEAR APERTURE

PROTECTED AS NEEDED

1. SUBSTRATE: N-BK7


2. S2 TO BE PARALLEL WITH S1 TO <1 ARCMIN

3. COATING (APPLY ACROSS CLEAR APERTURE)

S1: MgF2 (400-700nm) S2: MgF2 (400-700nm) Ravg ≤1.75% @ 400 - 700nm



5. ROHS COMPLIANT

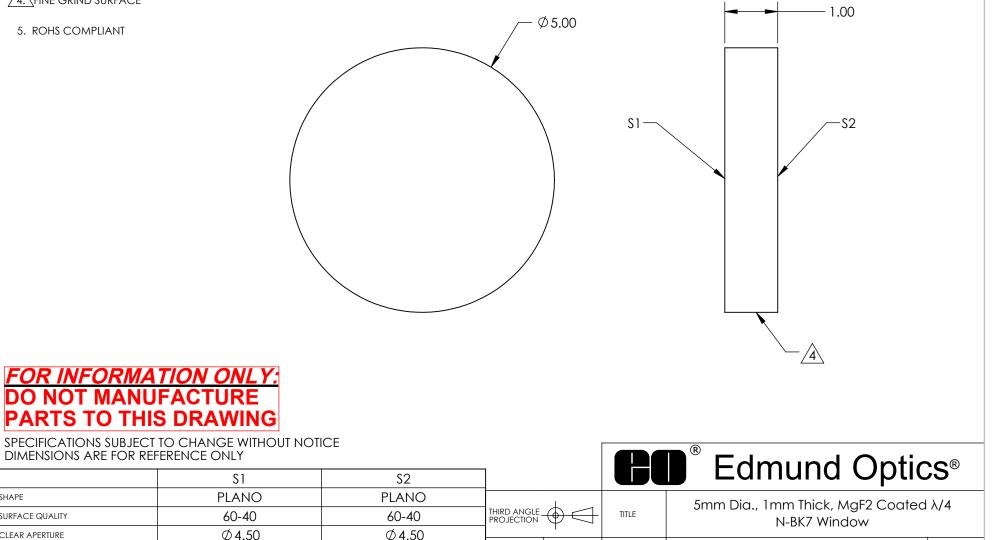

DWG NO

23355

ALL DIMS IN

PROTECTED AS NEEDED

mm

SHEET

1 OF 84