
NOTES:

1. SUBSTRATE:


FUSED SILICA CORNING 7980

- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE) \$1&\$2: VIS-EXT (350-700nm) Ravg ≤0.5% @ 350 - 700nm @ 0° AOI





5. ROHS COMPLIANT

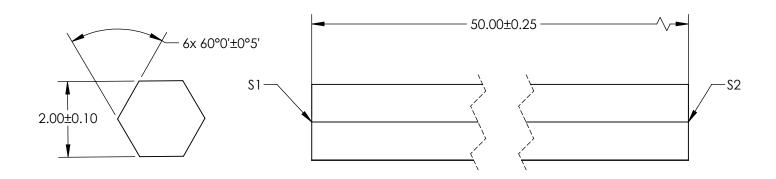

PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

\$1	\$2		
PLANO	PLANO	THIRD ANGLE _ PROJECTION	-
1λ	1λ		_
60 - 40	60 - 40	ALL DIMS IN	
	1λ	1λ 1λ	PLANO PLANO PROJECTION 1λ 1λ ALL DIMAS IN.



IRD ANGLE OJECTION	$\phi \Leftrightarrow$	TITLE	2mm Aperture x 50mm L, VIS-EXT Coated, Standard NA, Fused Silica Light Pipe		
LL DIMS IN	mm	DWG NO	70715	SHEET 2 OF 21	

