NOTES:


1. SUBSTRATE:


FUSED SILICA CORNING 7980


- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE) \$1&\$2: VIS-EXT (350-700nm) Ravg ≤0.5% @ 350 - 700nm @ 0° AOI



5. ROHS COMPLIANT



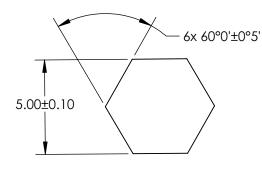

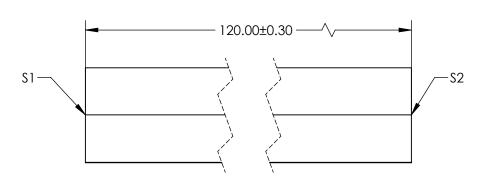

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

DIMENSIONS ARE FOR	REFERENCE ONLY				
	S1	\$2		1	
SHAPE	PLANO	PLANO	THIRD ANGLE PROJECTION	$\oplus \lhd$	TITLE
SURFACE FLATNESS	1λ	1λ			
SURFACE QUALITY	60 - 40	60 - 40	ALL DIMS IN	mm	DWG NO

Edmund Optics ®

ANGLE .	ϕ	TITLE	5mm Aperture x 120mm L, VIS-EXT Coo Low NA, Fused Silica Light Pipe	ated,
OIMS IN	mm	DWG NO	70725	SHEET 12 OF 21