




NOTES:

1. SUBSTRATE:  
Fused Silica
2. COATING (APPLY ACROSS COATING APERTURE):  
S1 & S2: VIS 0° (425-675nm)  
R(AVG) ≤0.4% @ 425 - 675nm
3. EFFECTIVE FOCAL LENGTH: 46.7mm
4. DIVERGENCE ANGLE: ±0.25 °
5. WAVELENGTH RANGE (nm): 250 - 700
6. ROHS: COMPLIANT

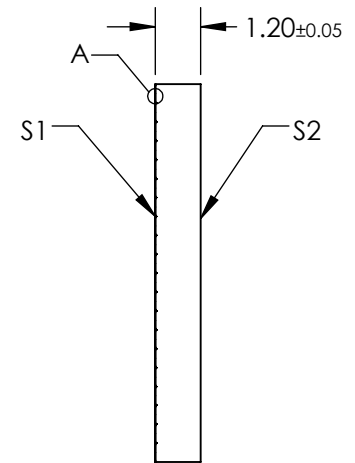

DETAIL A

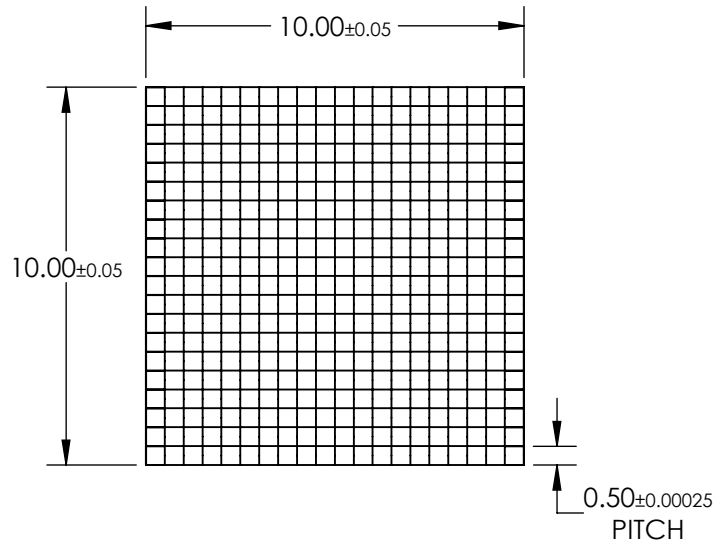

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**EO**® Edmund Optics®

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

THIRD ANGLE PROJECTION		TITLE	Microlens Array 10 x 10mm, 500µm Pitch, 0.25° Divergence, VIS 0° Coated	
ALL DIMS IN	mm	DWG NO	72248	SHEET 1 OF 1