## NOTES:


1. SUBSTRATE:

FUSED SILICA (CORNING 7980)

- 2. S1 TO BE PARALLEL WITH S1 TO WITHIN <1 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE) \$1 & \$2: VIS 0° (425-675nm) R(AVG) ≤0.4% @ 425 - 675nm



5. ROHS COMPLIANT

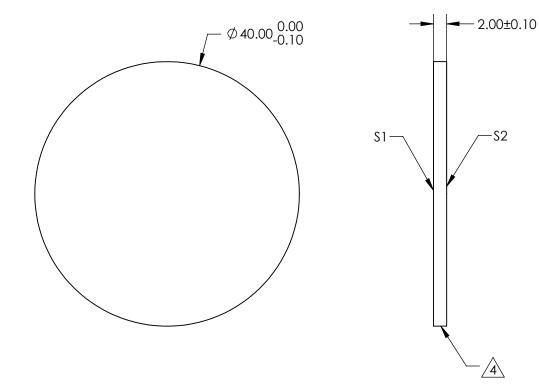

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

57 OF 84

	\$1	S2		İ	
SHAPE	PLANO	PLANO			T
SURFACE QUALITY	40 - 20	40 - 20	THIRD ANGLE PROJECTION	$\oplus$	
CLEAR APERTURE	Ø36.00	Ø36.00	<u> </u>		$\vdash$
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	

	Edmund Optics®
	40mm Dia., 2mm Thick, VIS 0° Coated, λ/4

JECTION	$\phi \triangleleft$	TITLE	Fused Silica Window	
DIMS IN	mm	DWG NO	72397	SHEE 57 O