
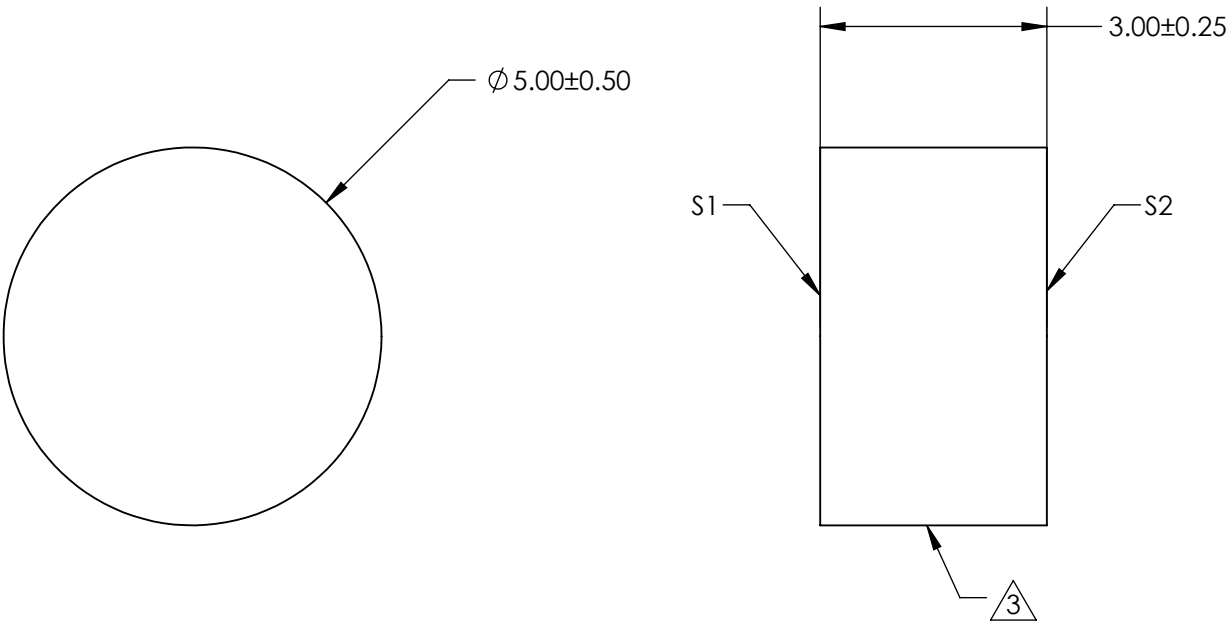




- NOTES:
- 1. SUBSTRATE: FLOAT GLASS
  - 2. COATING (APPLY ACROSS CLEAR APERTURE)  
  
S1 & S2: BBAR (425-700nm)  
R(AVG) ≤0.5% @ 425 - 700nm
  - 3. FINE GRIND SURFACE
  - 4. ROHS COMPLIANT



**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2			 Edmund Optics®		
SHAPE	PLANO	PLANO	<div>THIRD ANGLE PROJECTION</div> 	TITLE	5mm Dia. x 3mm High Efficiency Window		
SURFACE QUALITY	80 - 50	80 - 50					
CLEAR APERTURE	Ø 4.50	Ø 4.50					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	71565	SHEET 2 OF 18